

OBO Pro.2**SPECIFICATIONS**MODEL NO.
OBO-1212C-C2PART NAME
Magnetic TransducerSHEET
2 OF 4**MODEL NO : OBO-1212C-C2(不加防水貼紙)****Features :Conformity RoHS Directive (2002/95/EC) Requests.****1.General Specifications :**


Items	Specification
※ Sound Pressure Level	85 dB min./10cm/DC 12V
Rated Voltage	DC 12V
※ Resonant Frequency	2300 ± 300 Hz
※ Rated Current	30 mA max./DC 12V
Operating Voltage	DC 8 to 16V
Housing Material	NORYL
Operating Temp. Range	-30°C to +85°C
Storage Temp Range	-40°C to +85°C
Weight	2.0 gms

2.Mechanical Layout and Dimensions :

※ Value applying rated voltage.(DC)

2.1 Shape & Dimensions

Unit:mm Tolerance:±0.5

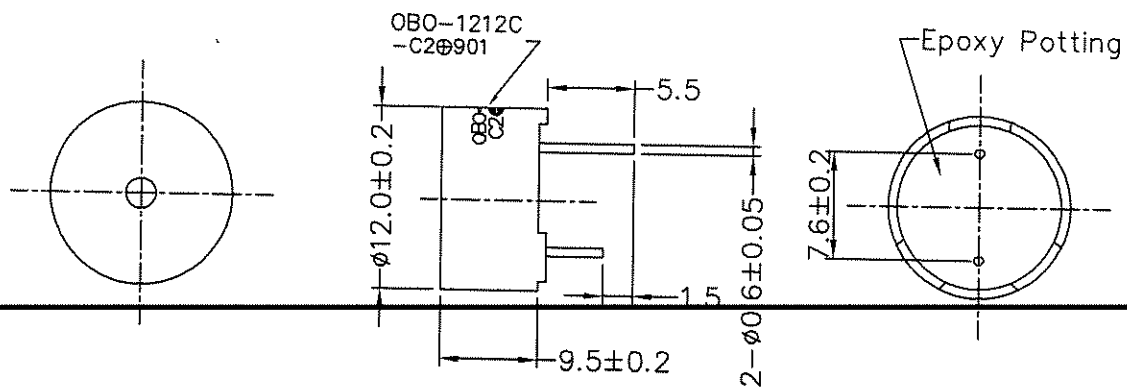

Wave Solder

OBO Pro.2**SPECIFICATIONS****MODEL NO.**
OBO-1212C-C2**PART NAME**
Magnetic Transducer**SHEET**
3 OF 4**2.2 Meaning of Stamp Mark**

901 : Production Period

9 : Year 2009(last 1 figures of the year)

01 : Week (01~55)

3. Soldering Condition :**3.1 Wave Soldering**

Peak temperature	Dipping time	Soldering
+ 260°C	5 seconds	1 time

3.2 Hand Soldering

Iron Tip Temperature	Soldering time
+ 380°C Max.	Duration 3 seconds Max.

OBO Pro.2

SPECIFICATIONS

MODEL NO.
OBO-1212C-C2

PART NAME
Magnetic Transducer

SHEET
4 OF 4

4.Packing Information :

