

OBO Pro.2	SPECIFICATIONS	MODEL NO. OBO-1005C-A2
	PART NAME Magnetic Transducer	SHEET 2 OF 3

MODEL NO : OBO-1005C-A2

Features : Sealed with built-in oscillating circuit for wave solder and wash not allowed.

1、General Specifications :


Items	Specification
※ Sound Pressure Level	80 dB min./10cm/DC 5V
Rated Voltage	DC 5V
※ Resonant Frequency	2500 ± 200 Hz
※ Rated Current	25 mA max./DC 5V
Operating Voltage	DC 3 to 7 V
Housing Material	NORYL
Operating Temp. Range	-20°C to +70°C
Storage Temp Range	-30°C to +80°C
Weight	2.0 gms

※ Value applying rated voltage.(DC)

2、Mechanical Layout and Dimensions :

2.1: Shape & Dimensions

Unit:mm Tolerance: ±0.5

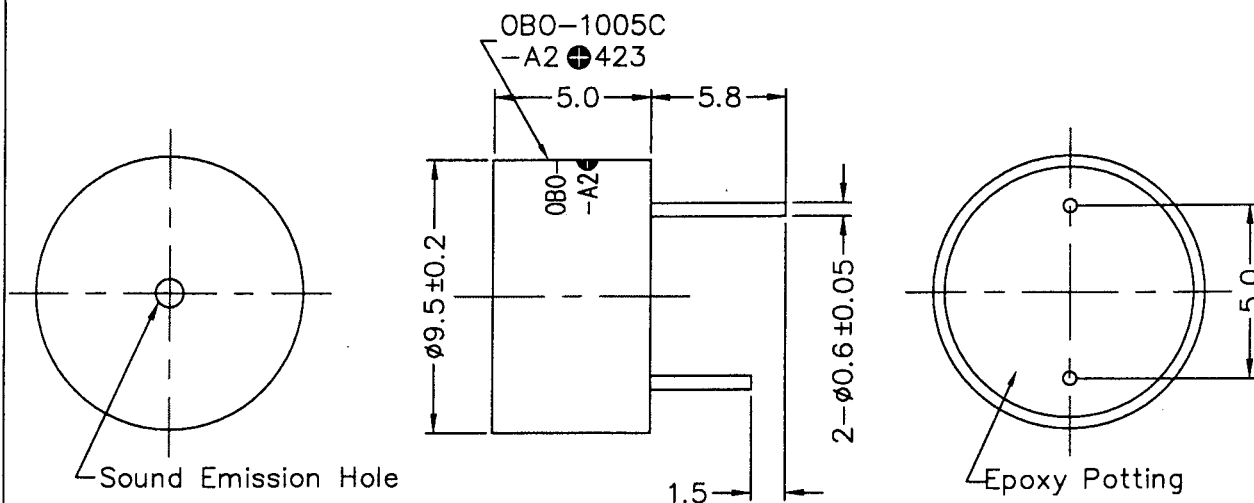

OBO.Pro.2	SPECIFICATIONS	MODEL NO. OBO-1005C-A2
	PART NAME Magnetic Transducer	SHEET 3 OF 3

2.2 Meaning of Stamp Mark

423 : Production Period

4 : Year 2004(last 1 figures of the year)

23 : Week (01~55)

3、Packing Information :

