

OBO Pro.2.	SPECIFICATIONS	MODEL NO. OBO-35T6
	PART NAME Piezoelectric Buzzer	SHEET 2 OF 5

Model No. : OBO-35T6


Features : External drive & Pb-free Soldering Type

1. General Requirements

Items	Spec.
Sound Pressure Level	80dB Min. at 800Hz/9Vp-p Square Wave/10cm.
	70dB Min. at 800Hz/1Vrms Sine Wave/10cm.
Capacitance	60,000pF \pm 30% at 120Hz
Current Consumption	4mA Max. at 800Hz/9Vp-p Square Wave
Allowable Input Voltage	30Vp-p Max.
Case Material	ABS(UL 94HB)
Operating Temp. Range	-20°C to +60°C
Storage Temp. Range	-30°C to +70°C
Weight	9.5 gms
Frequency Response	As Per Fig.1

2. Test Method

2.1 Standard Test Diagram

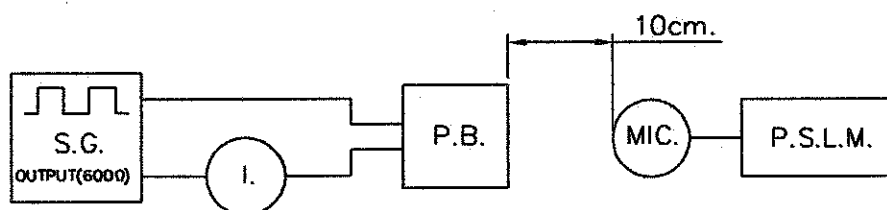

- S.G. : GAG-808G Audio Generator or Equivalent
- MIC. : B&K-4176 Micphone or Equivalent
- P.S.L.M. : B&K-2232 Precision Sound Level Meter or Equivalent
- I. : GDM-8145 Multimeter or Equivalent
- P.B. : Piezoelectric Buzzer

Note: Please pay attention never to be applied DC voltage to piezo sounder

OBO.Pro.2.

SPECIFICATIONS


MODEL NO.
OBO-35T6

PART NAME
Piezoelectric Buzzer

SHEET
3 OF 5

3. Appearance and Dimensions

Unit : mm Tolerance : ± 0.5

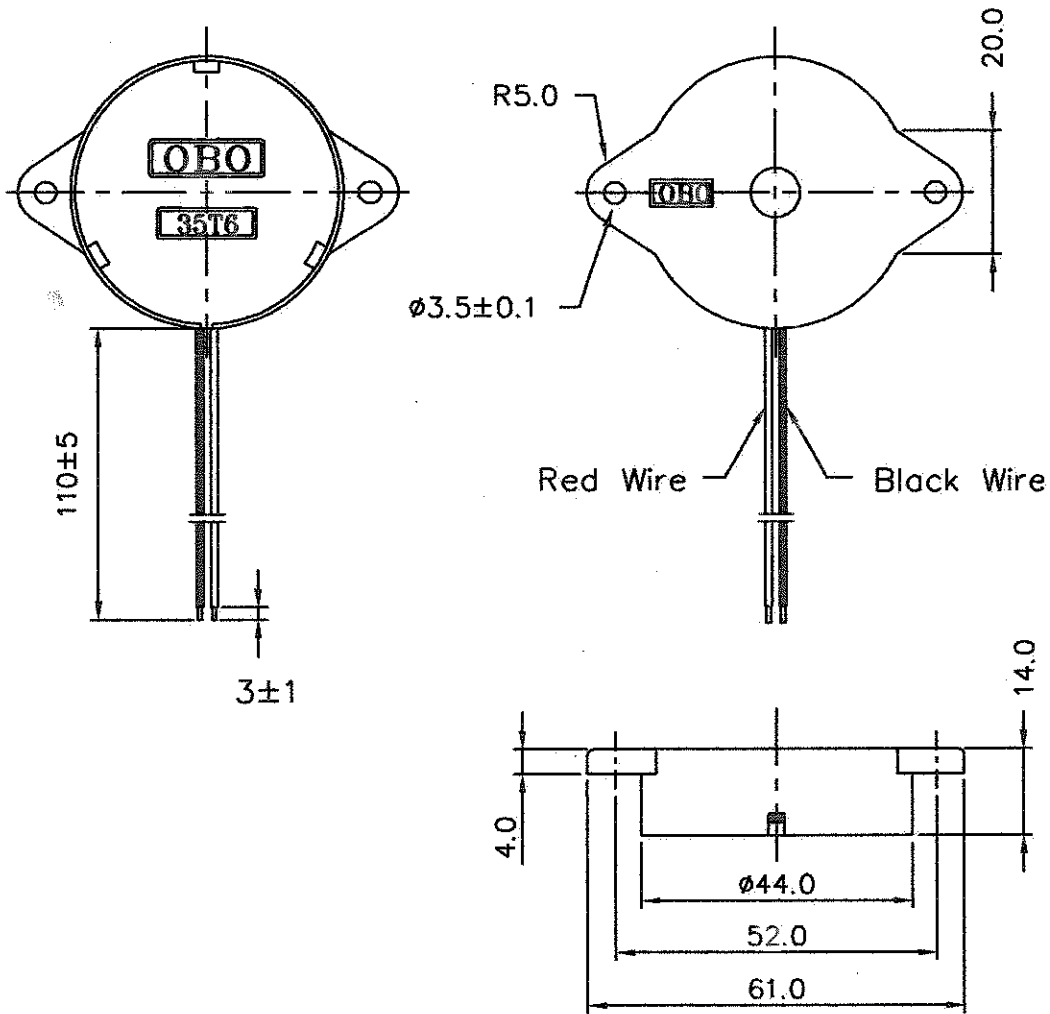

Customer	Lead Wire
Standard	UL1095#28

OBO.Pro.2.

SPECIFICATIONS

MODEL NO.
OBO-35T6

PART NAME
Piezoelectric Buzzer


SHEET
4 OF 5

4. Soldering condition


4.1 Hand soldering / touchup

soldering iron tip temperature 380 °C for 3 seconds.


5. Package



Buzzer




50pcs./ Box
21.8*15.2*6.1cm

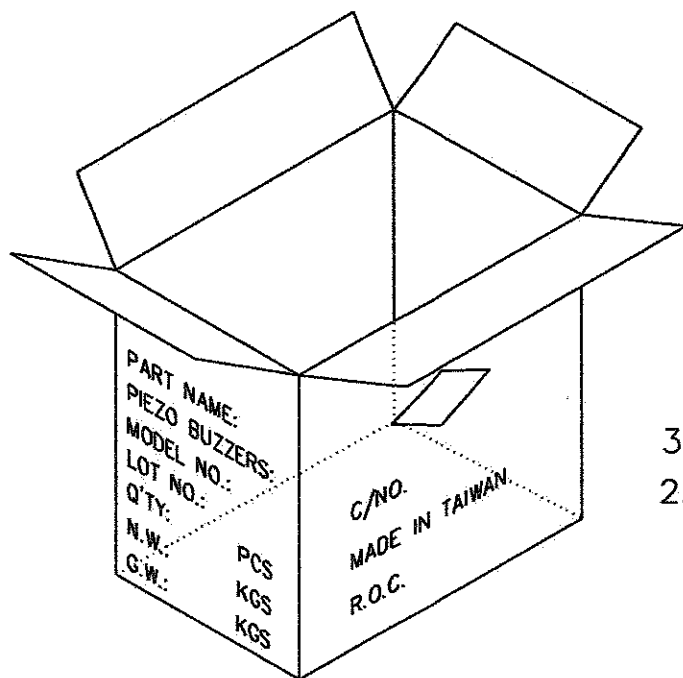

30 Box(1,500pcs)/ Carton
2.52 π (488*452*352mm)

SHEET
5075

Fig. 7: Frequency Response, Magn dB re 20.00µpa

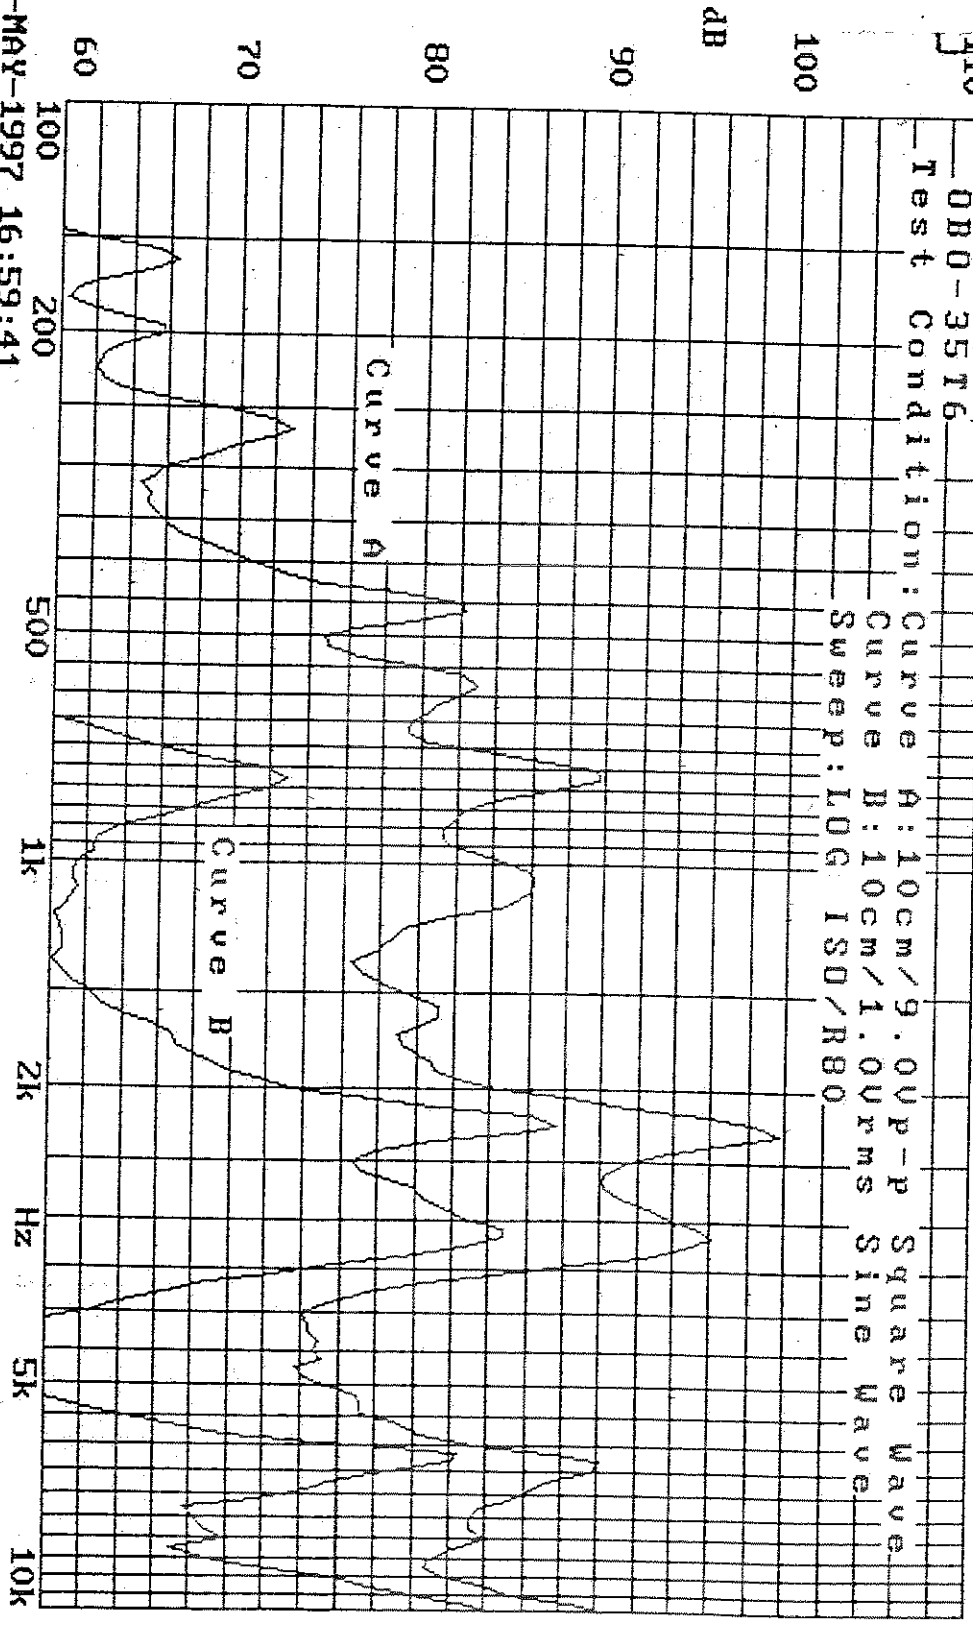

01-MAY-1997 16:59:41

Mode: SSR

