




**OBO Pro.2****SPECIFICATIONS****MODEL NO.**  
OBO-45AL1**PART NAME**  
SMD-Electromagnetic Transducer**SHEET**  
2 OF 9

MODEL NO : OBO-45AL1

**Features : Conformity RoHS Directive ( 2002/95/EC ) Requests. (※1)**

## 1. General Specifications :

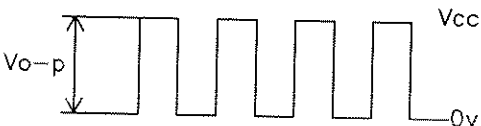Items	Spec.	Conditions
1.1 Rated Voltage	3.0 $V_{o-p}$	 <p>Squarewave 1/2 Duty</p>
1.2 Operating Voltage	2-4 $V_{o-p}$	
1.3 Resonant Frequency	2300Hz	
1.4 Sound Pressure Level	min. 87dB	Standard State, Standard Drive circuit, Rated Voltage, Distance at 0.1m(A-weight) 2300Hz Squarewave 1/2 Duty.
1.5 Average Current Consumption	max. 80mA	
1.6 Coil Resistance	16±3Ω	
1.7 Operating Temp. Range	-30°C ~ +70°C	SPL ≥ 80dB at "1.4"
1.8 Storage Temp. Range	-40°C ~ +85°C	
1.9 Housing Material	LCP	
1.10 Weight	0.6g	

## 2. Standard test Conditions :

2.1 Standard State	Ordinary Temperature	15°C to 35°C
	Ordinary Humidity	25% to 85%
	Ordinary air pressure	860 to 1060hPa


In case of doubtful judgment, the test is re-performed under Basic State.

2.2 Basic State	Temperature	20±2°C
	Humidity	60% to 70%
	Ordinary air pressure	860 to 1060hPa


## 3. Test method :

### 3.1 Standard Drive Circuit

Signal amplitude should be large enough to saturate the transistor which drives the buzzer.

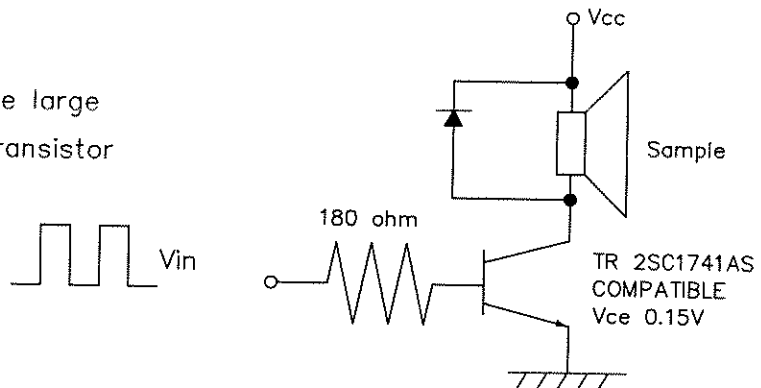


### 3.2 Standard Test Fixture

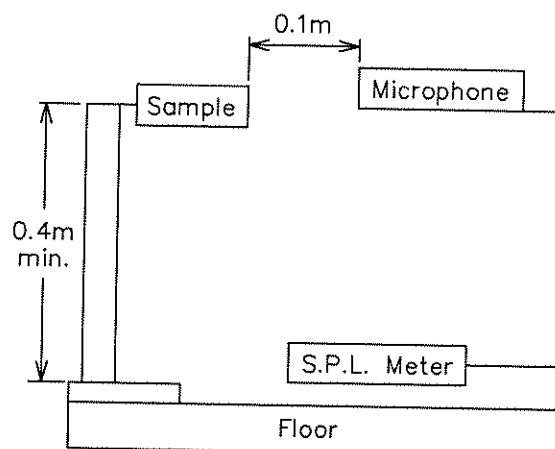

### 4. Soldering Condition :

#### 4.1 Reflow Soldering (※1)

Recommendable reflow soldering condition is as follows.

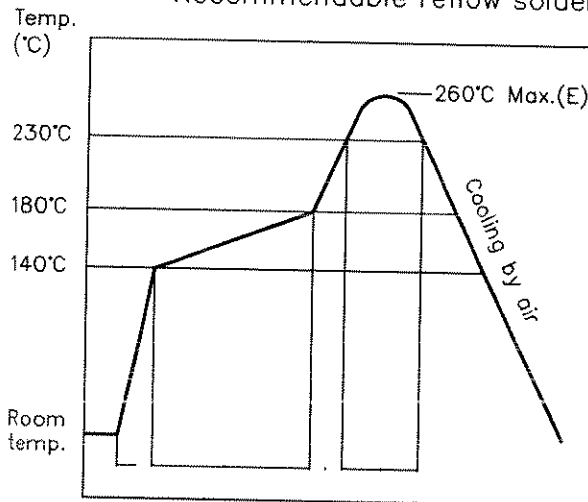

NO.	Items	Condition	Unit
A	Temp. rise gradient	1 ~ 4	°C/sec
B	Heating time	50~150	sec
	Heating temperature	140~180	°C
C	Temp. rise gradient	1 ~ 4	°C/sec
D	Time over 230°C	48 Max.	sec
E	Peak temperature	260°C Max.	°C
	Peak-temp. hold time	Momentary	sec
Soldering		2	times


Note :

It is requested that second reflow soldering should be executed after heat of product goes down to normal temperature.

#### 4.2 Hand Soldering (※1)


Soldering iron temperature 380°C less than 3 second.

#### 4.3 Soldering Pattern

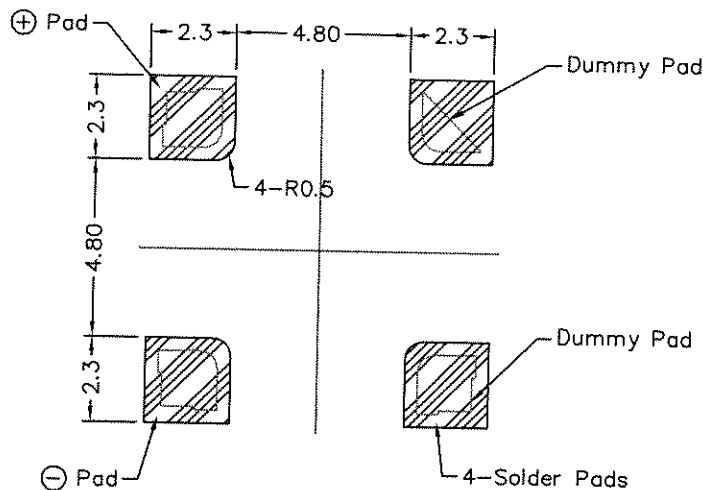

**OBO Pro.2®****SPECIFICATIONS**MODEL NO.  
OBO-45AL1PART NAME  
SMD-Electromagnetic TransducerSHEET  
5 OF 9

## 5. Mechanical Layout and Dimensions

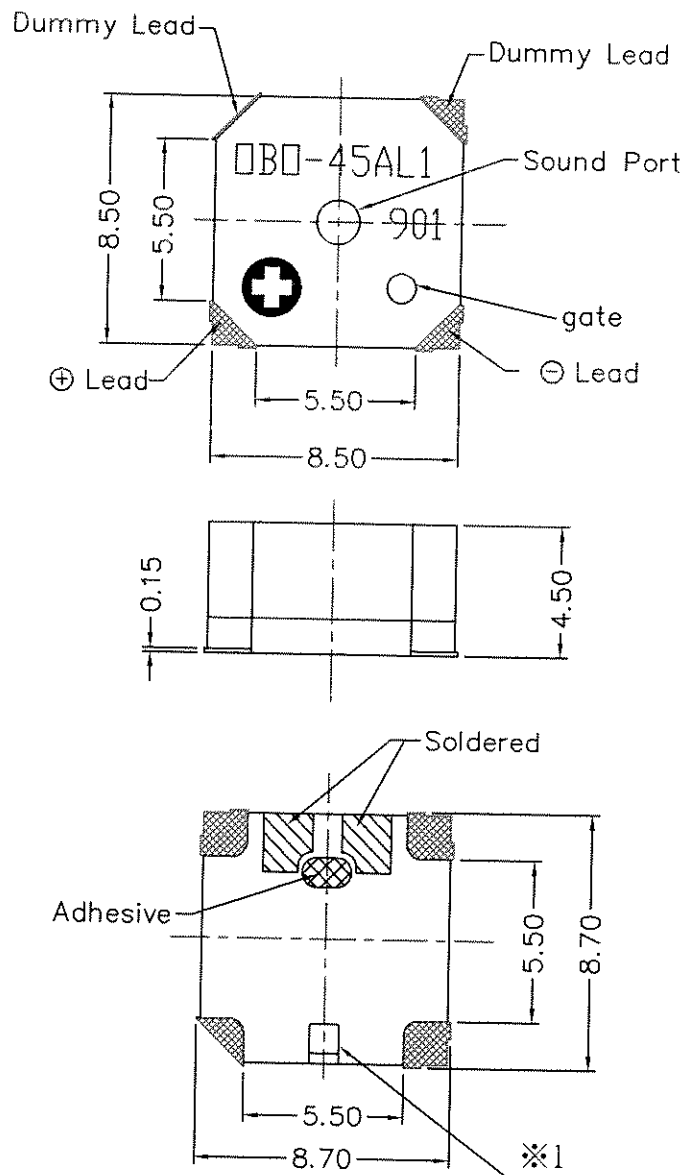Unit : mm Tolerance :  $\pm 0.2\text{mm}$ 

Note : Meaning of Stamp Mark

901 : Production Lot No.


9 : Year 2009 (last 1 figures of the year)

01 : week (01 ~55)

OBO-45AL1 : Model No.

⊕ : Polarity identification mark

## 6. Reliability test :

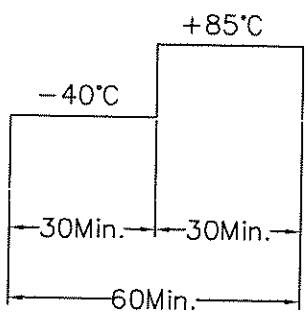NO.	Items	Test Conditions	Evaluation Criteria
6.1	High Temp. Storage	The part shall be capable of withstanding a storage temperature of +85°C for 240 hours.	After the test the part shall meet specifications without any degradation in appearance and performance except SPL. SPL shall be 80dB or more.
6.2	Low Temp. Storage	The part shall be capable of withstanding a storage temperature of -40°C for 240 hours.	
6.3	Thermal Shock	The part shall be subjected to 50 cycle. One cycle shall consist of : transfer time : 10 minutes  <p>The diagram shows a rectangular wave between -40°C and +85°C. The total duration is 60 minutes, with 30 minutes at -40°C and 30 minutes at +85°C.</p>	
6.4	Humidity Test	The part shall be subjected to +60°C, 90% RH for 240 hours, and expose to room temperature for 6 hours.	
6.5	Vibration	10 – 55 – 10Hz, Sinewave Sweep 15 min. X,Y,Z 3 Direction 2 hours each, Total 6 hours.	
6.6	Drop test	Drop on hard wood board of 5cm. thick, any direction, 10 times, at the height of 150cm	

NO.	Items	Test Conditions	Evaluation Criteria
6.7	Ordinary Temp. life	The part shall be subjected to 240 hours at $25 \pm 10^\circ\text{C}$ . Input 3.0Vp-p Squarewave 1/2duty 2700Hz	
6.8	High Temp. life	The part shall be subjected to 240 hours at $+70^\circ\text{C}$ . Input 3.0Vp-p Squarewave 1/2duty 2700Hz	
6.9	Low Temp. life	The part shall be subjected to 240 hours at $-30^\circ\text{C}$ . Input 3.0Vp-p Squarewave 1/2duty 2700Hz	
6.10	Reflow (*1)		<p>a. No abnormality should be found after the test</p> <p>b. Good soldering to meet soldering requirements</p>

Notes :

As this product is not protected from foreign material entering, please make sure that that any foreign materials (e.g. magnetic powder, washing solvent, flux, corrosive gas) do not enter this product in your production processes. The functional degradation (e.g. SPL down ) may occur if foreign material enter it.

# OBO Pro.2®






## SPECIFICATIONS

MODEL NO.  
OBO-45AL1

PART NAME  
SMD-Electromagnetic Transducer

SHEET  
8 OF 9

### 7. Packing

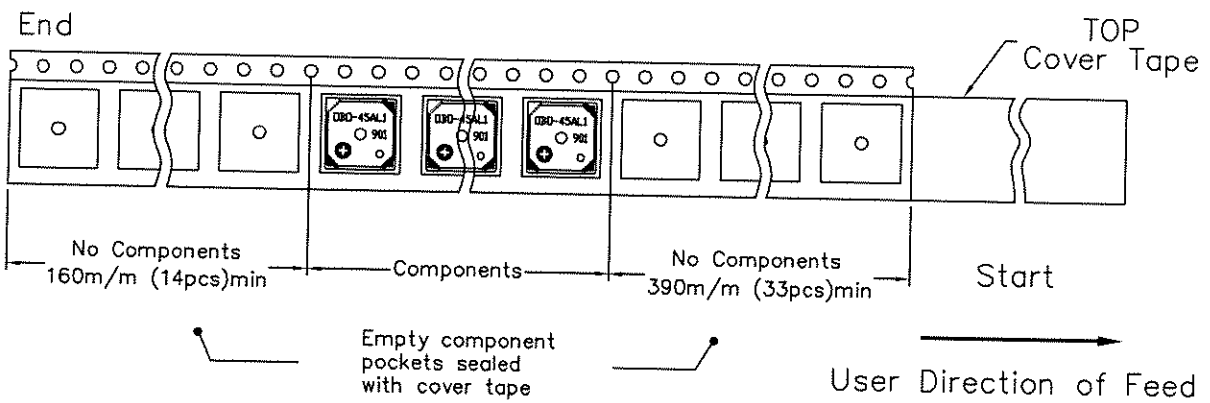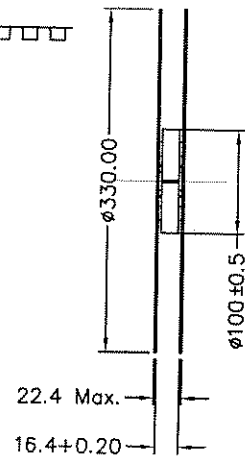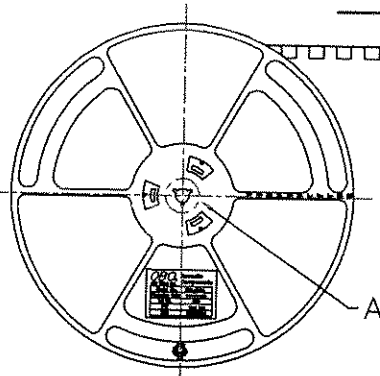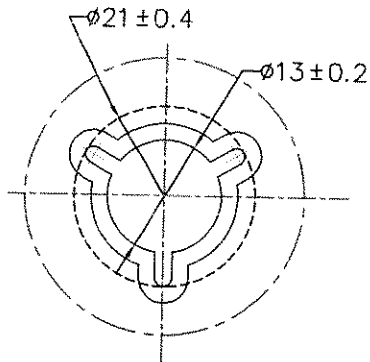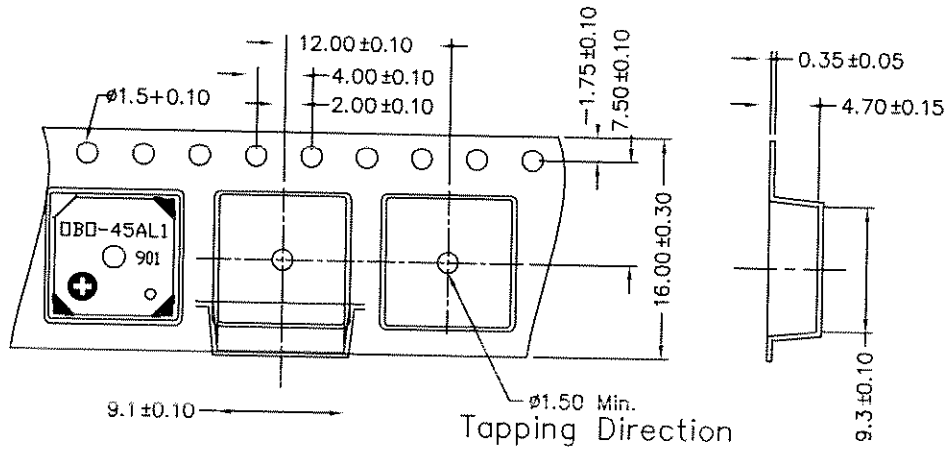

# OBO Pro.2


## SPECIFICATIONS


**MODEL NO.**  
OBO-45AL1

**PART NAME**  
SMD-Electromagnetic Transducer


**SHEET**  
9 OF 9

Label content

	
Model No.	OBO-45AL1
Production Order	*****
Lot NO.	***
Q'TY	1000 pcs
Date	*****

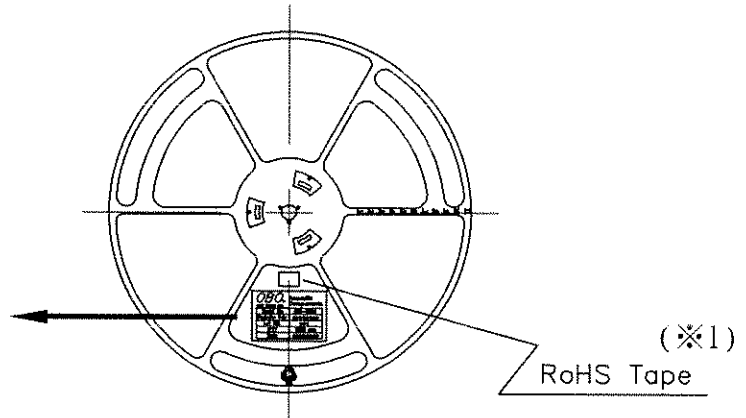


Inside box

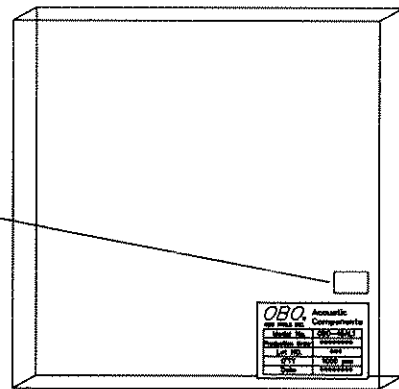

1 Reel / Inside box  
(33.3\*2.4\*33.5)

RoHS Tape (※1)

Carton

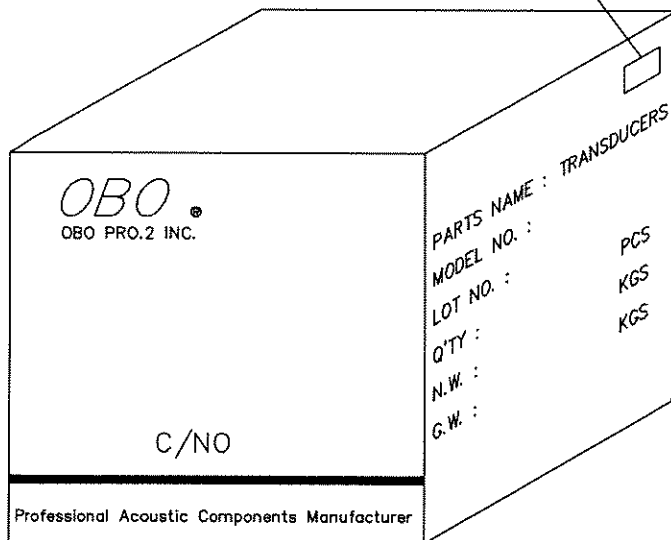

10 Inside box (10000pcs)  
/ Carton (34.5\*26.5\*35.3)

