

ALTERNATION HISTORY

文件发

[illegible]

REV.	DATE	PREPARED BY	CHECKED BY	APPROVED BY
D	MAY,21,2009	 L. A. Lopez	 L. A. Lopez	Josam

OBO Pro.2**SPECIFICATIONS****MODEL NO**
OBO-57032F-01**PART NAME**
DYNAMIC SPEAKER**OBO** **PRO.2** **SHEET**
016

2003/12/26

文件发行

MODEL NO : OBO-57032F-01**Features:Conformity RoHS Directive(2002/95/EC) Requests.**

※1

1. General Specifications

Items	Spec.
Weight	Approx 17.0 Grams
Nominal Impedance	32 Ohm $\pm$ 15% At 700 Hz /1.0V
Power Rating	Normal 0.5W. Maximum 1.0W.
Lowest Resonant Frequency	500 $\pm$ 20%Hz.
Output Sound Pressure Level (S.P.L)	86 $\pm$ 3dB /4.0V/0.5Meter ,Average at 1000,1200,1500,2000Hz.
Frequency Range	FO ~ 20KHz. Average SPL -10dB.
Distortion	5% Maximum At 1000Hz/4.0V
Diaphragm over buffer	1.0mm,Sin wave4.0V,at 50 ~ 5000Hz
Polarity test	Diaphragm Shall Move Forward When Apply a Positive DC Current To The"+" or "Marked" Terminal.
Buzzes & Rattles	Sine wave between at 3.1 Vrms/50~5000Hz
Operating Temperature	-25°C to +50°C
Storage Temperature	-25°C to +55°C


2. Environmental Test

Humidity Test	Temperature	:	+40°C $\pm$ 3°C
	Relative Humidity	:	90% ~ 95%
	Duration	:	96 Hours
	Duration of recovery	:	6 Hours
Temperature Cycle Test	Temperature	:	+55°C $\rightarrow$ +25°C $\rightarrow$ -25°C $\rightarrow$ +25°C
	Duration	:	1Hour 1Hour 1Hour 1Hour
	Cycle	:	3 Cycles
Drop Test	70cm Free Falling On Concrete Floor, with 10 times.		
Load Test	White Noise With Weighted Filter 4.0Volts.(RSM) 100Hrs.		

3. Mechanical Layout And Dimensions


3.1 Dimensions

Unit:mm Tolerance:±0.3mm


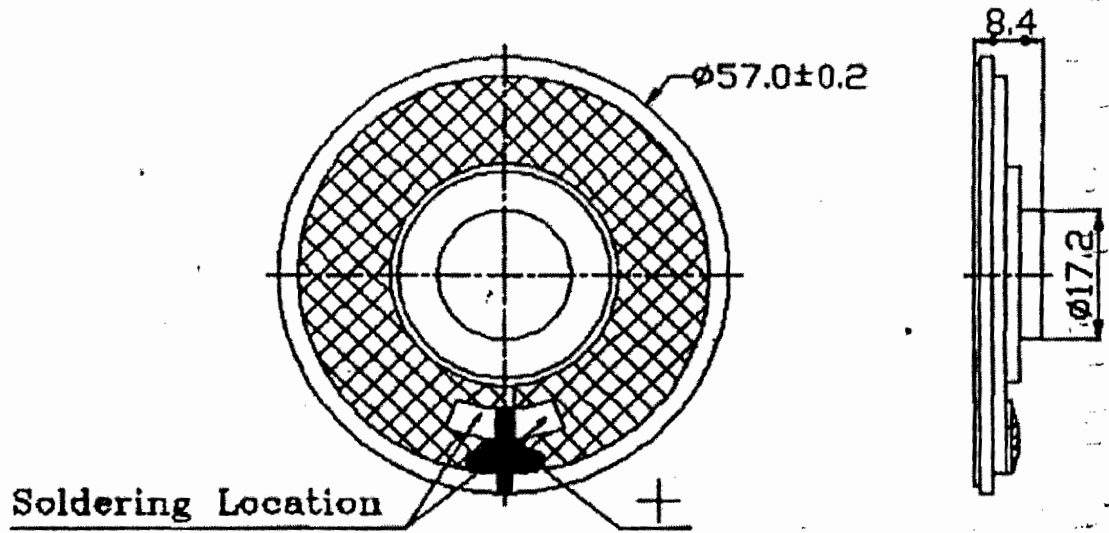


PCB Soldering Temperature 280°~320° with in 3 seconds.

3.2 Construction Diagram

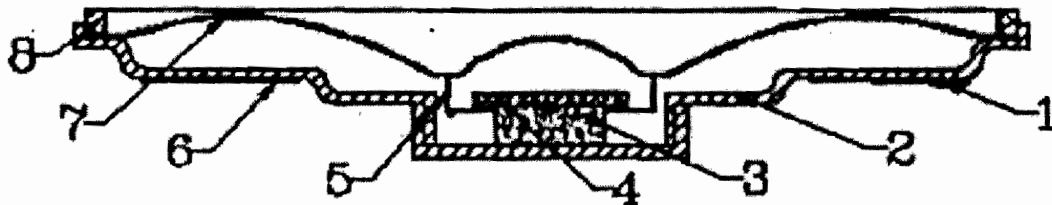

NO	PART NAME	MATERIAL
1	TERMINAL	P.C.B
2	YOKE	SPCC
3	MAGNET	NDFEB
4	WASHER	SPCC
5	VOICE COIL	DIA 13.45mm
6	CLOTH	CLOTH
7	DIAPHRAGM	MYLAR
8	GASKET	PAPER

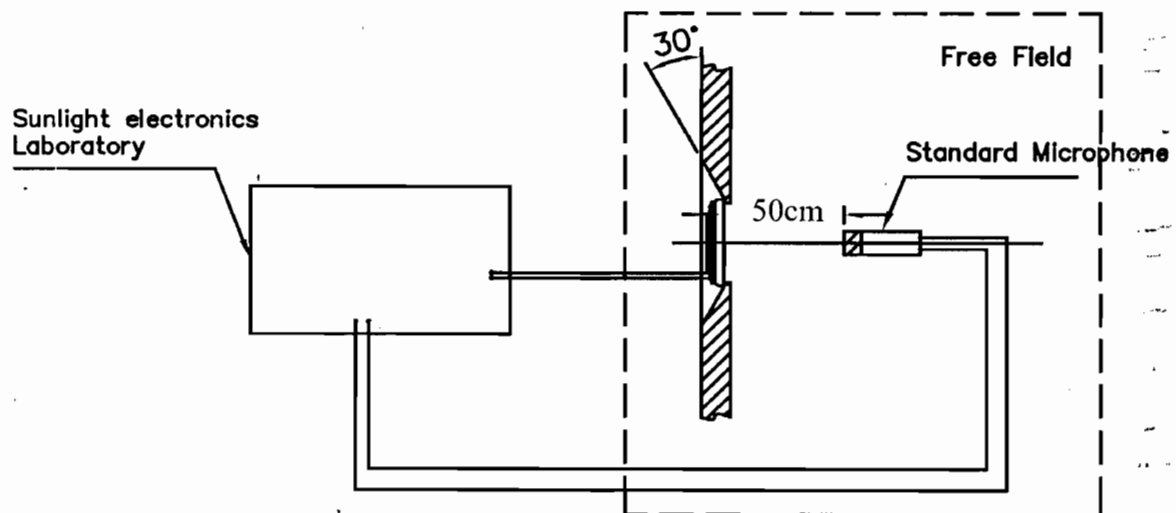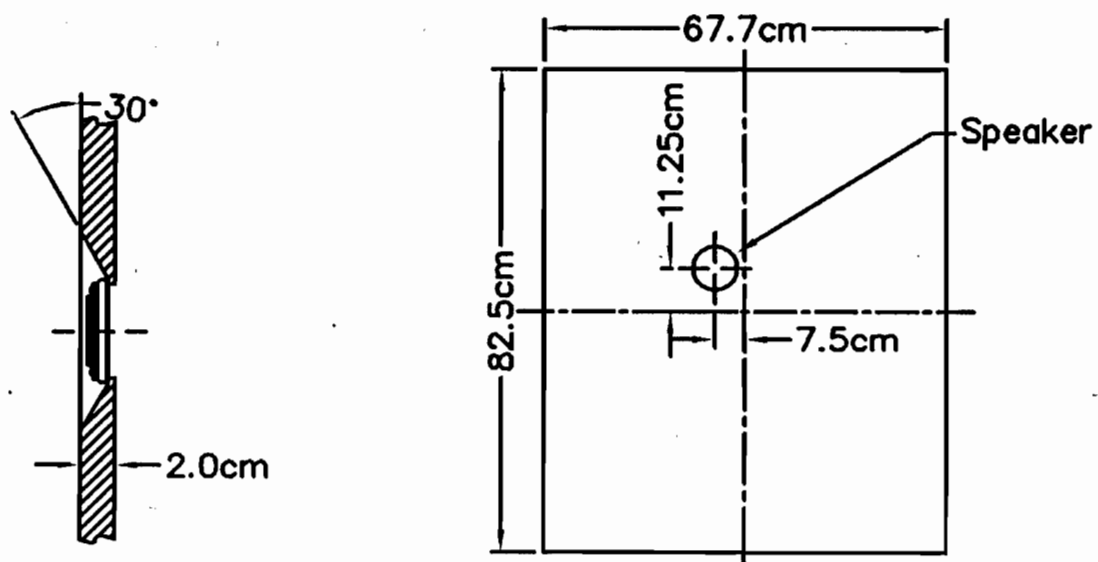4. Test Method**4.1 Measurement Diagram**Electroacoustic
Testing Adapter**4.2 Standard Baffle**

OBO Pro.2

SPECIFICATIONS




MODEL NO
OBO-57032F-01

PART NAME
DYNAMIC SPEAKER

SHEET
5 OF 6

5.Packing Standard

OBO PRO.2 INCH
2009 MAR 26
文件发行部

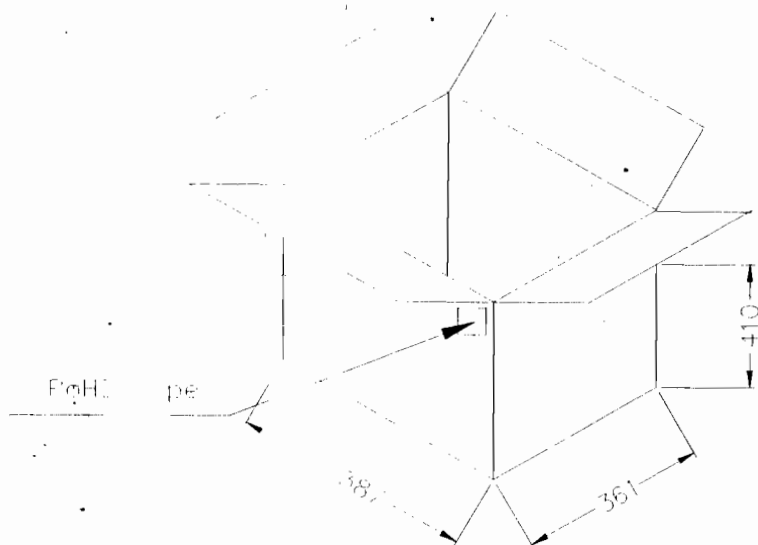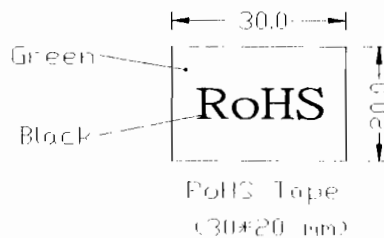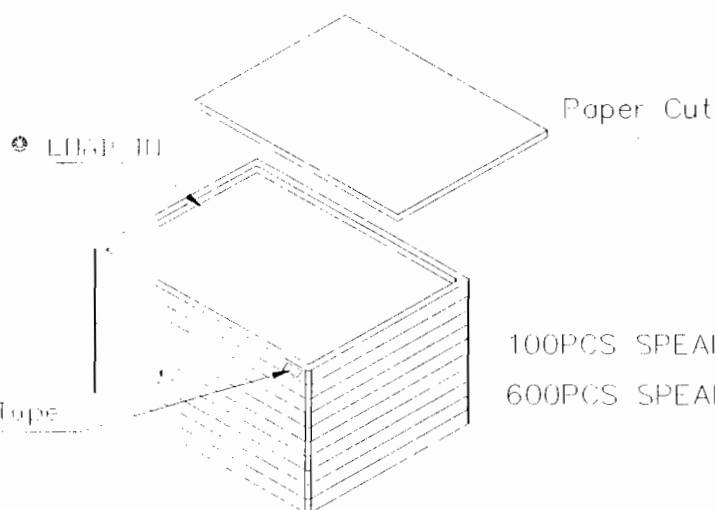

OBO Pro.2

SPECIFICATIONS

MODEL NO
OBO-57032F-01


PART NAME
DYNAMIC SPEAKER

SHEET
6 OF 6

6.Frequency Response Curve

Firm: OBO Model: 57032F-01 DATE: 05-15-2009 TIME: 22:24:35
1000Hz Sens.: 84.9dB SPL Pass F.R.: Pass DCR: 34.72 Pass
Average SPL: 84.7dB SPL Pass (1000; 1200; 1500; 2000Hz) Sweep Speed: 1/24 Oct.

B 6.11

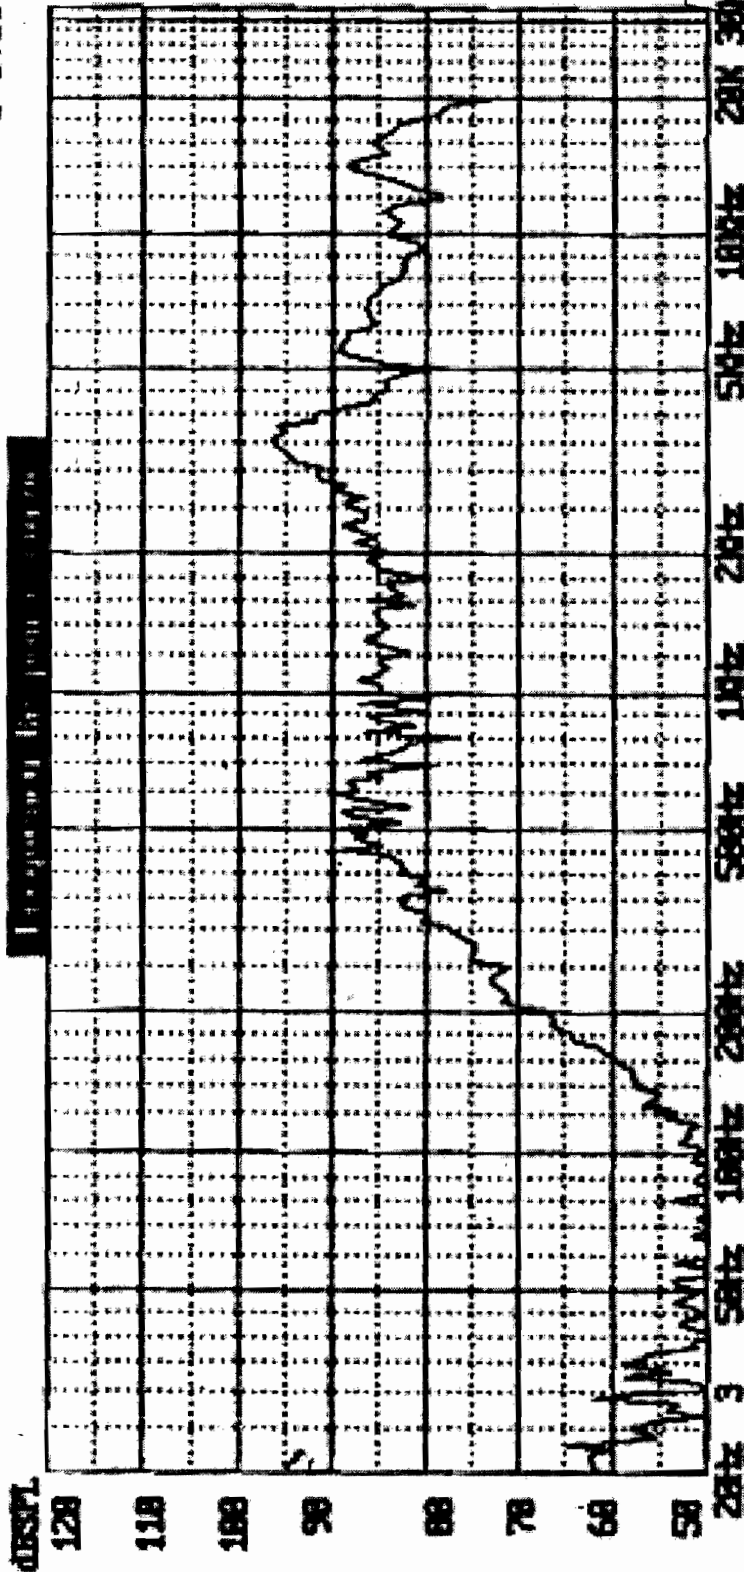

Voltage applied for **1.000V** = 4.000V
Measuring Distance = 0.5m

Mfg.:

Measured using Sunlight 1500; Fax: 886-2-2222222

OBO PRO.2 INC
2009 MAR 26
文件