

## OBO PRO.2 INC.

No. 224-9, LANE 105, YUNG-FENG ROAD, PA-TE CITY, TAOYUAN, TAIWAN, R.O.C.  
 TEL:886-3-361-4436 FAX:886-3-361-4437  
 E-MAIL:obo@obo.com.tw Website:www.obo.com.tw

## SPECIFICATION

## 1. SCOPE

This specification is applied to the piezoelectric diaphragm.

2. MODEL NO. : OBO-TE35229-16


## 3. SPECIFICATION(at 25 °c)

- 3.1 Resonant Frequency : 2.9 ± 0.4KHz  
 3.2 Resonant Resistance : 300 OHM max  
 3.3 Capacitance : 30,000pF ± 30% at 120Hz  
 3.4 Input Voltage : 30Vp-p max.  
 3.5 Operating Temperature : -20°C to +60°C  
 3.6 Storage Temperature : -20°C to +70°C  
 3.7 Dimension : as per Figure 1.

① Piezoelectric Ceramics

② Brass Plate

Figure 1. Unit :m.m

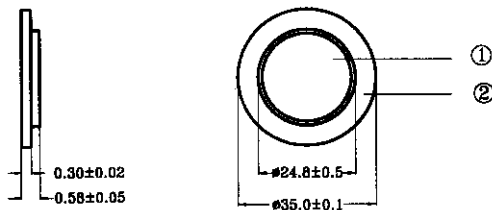

Drawing by

林仲祥 5/14

Checked by

陳弘  
陳弘  
陳弘

Approved by

陳弘  
陳弘  
陳弘

DWG. NO.

STE083-C